






AMC-A2001N (20X , 59.5° FOV)
AMC-A1202N (12X , 72.5° FOV)




Features

- ※ H.265 video compression, dual stream
- ※ Compatible with ONVIF, RTSP, RTMP protocols
- ※ 2.14MP, 1/2.8" CMOS
- ※ Support up to 1080p60 and other video formats via SDI interface
- ※ With OSD menu
- ※ With HD-SDI interface
- ※ 1 audio input and 1 audio output
- ※ New design of PTZ mechanism with higher precision and reliability, presetting precision up to $\pm 0.01^\circ$
- ※ Support standard VISCA & Pelco communication protocols
- ※ With IR remote controller
- ※ Has image flip function for stand and suspended installation
- ※ Desktop, ceiling, wall and pendant mounting options

Dimensional Drawing

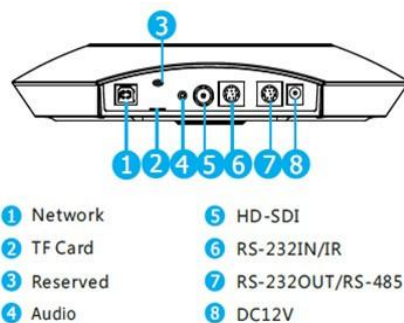


Accessories



Wall Bracket



Ceiling Plate



Pole Bracket

Technical Specification

Model No.	AMC-A2001N	AMC-A1202N
Image Sensor	1/2.8" Exmor CMOS, 2.14MP	
HD Signal Format	1080p/60,1080p/30,1080i/60,720p/60,720p/30	
Focal	f =4.7mm - 94mm	f = 3.9mm - 46.8mm
IRIS	F1.6 - F3.5	F1.6 - F2.8
Zoom	Optical: 20X, Digital: 12X	Optical: 12X, Digital: 12X
Field of View	59.5° - 2.9°	
Shortest Focus Distance	10mm -1,000mm	
Focus	Auto, Manual, PTZ Trigger AF, One push	
Min.Illumination	0.5Lux(Color), 0.1Lux(B/W)	
Shutter Speed	1/1 - 1/10,000s	
AGC	Auto/Manual	
White Balance	Auto, Indoor, Outdoor, One push, Manual, Auto Track	
AE Control	Auto, Manual, Shutter Priority, Iris priority	
S/N Ratio	Above 50dB	
PTZ		
Pan Range	-170° - +170°	
Tilt Range	-30° - +90°	
Pan Speed	0.1° - +120°/s	
Tilt Speed	0.1° - +90°/s	
Preset Number	256	
OSD	Yes	
Image Flip	Yes	
Network		
Max.Image Size	1920x1080	
Frame Rate	HD: 50Hz:50fps(1920x1080) ; 60Hz: 60fps(1920x1080)	
Video Compression	H.265 , H.264	
Audio Compression	AAC	
Protocol	HTTP, RTP, TCP,UDP, RTSP, RTMP, ONVIF	
Dual stream	Support	
Simultaneous Users	Up to 10 users	
Interface		
Ethernet	RJ45, 100M	
Video Output(HD)	HD-SDI	
Control Interface	RS232IN, RS232OUT/RS-485	
General		
Protocol	VISCA and Support Daisy Chain, PELCO-D, PELCO-P	
Spectra Address	0 - 63	
Power Consumption	Below 15W	
Working Temp	0°C - +40°C	
Storage Temp	-20°C - +60°C	
Dimension	226mm x 159mm x 206mm	
Weight	1.7KG	
Color	Grey	
Product specification are subject to change without notice		