




AMC-G200T speaker tracking camera helps to achieve intelligent meeting experience, implemented with both audio positioning and intelligent video analysis technology, it can automatically switch between close-up image to fram speakers and full view image to frame the whole participants, it frees of camera operation during a meeting and enables meeting attendees to focus more on.

Feature

- 1/2.8" Exmor CMOS, 2MP
- 12X optical zoom, up to 72.5°Fov
- Simultaneously output 3G-SDI, HDMI, Ethernet, Up to 1080p60 resolution
- Support H.264/H.265 video compression
- Implemented with both 3D voice positioning technology, body detection and recognition algorithm, it can precisely frame the speakers
- Automatically switch between close-up image for speakers and wide angle image for all attendees
- Built-in image switch rules according to actual meeting scenes

Dimension

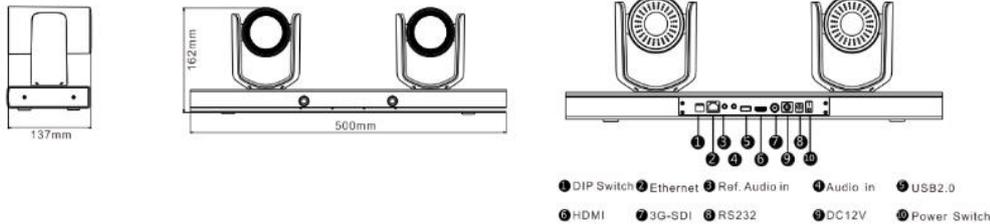

Technical Specification

Model No.	AMC-G200T
HD Camera	
Image Sensor	1/2.8" CMOS, 2.14MP
Signal Format(SDI)	1080p60/1080p50/1080p30/1080p25/1080i60/1080i50/720p60/720p50
Focal	f=3.9mm-46.8mm
Iris	F1.6-F2.8
Optical Zoom	12x
Digital Zoom	12x
Field of View	72.5° - 6.3°
Focus	Auto, Manual, PTZ Push, One Push
Min.Illumination	0.5Lux(Color), 0.1Lux(B/W)
Shutter Speed	1/25 - 1/10,000s

AGC	Auto/Manual
White Balance	Auto, Indoor, Outdoor, One Push, Manual, Auto Track
AE Control	Auto, Manual, Shutter Priority, Iris Priority
S/N	Above 50dB
DNR	2D/3D
BLC	Support
PTZ	
Pan Range	-90° - +90°
Tilt Range	-30° - +90°
Pan Speed	0.1° - +120°/s
Tilt Speed	0.1° - +80°/s
Preset Number	256
OSD	Yes
Image Flip	Yes
Network	
Image Resolution	1920 x 1080 @ 60fps
Video Compression	H.264, H.265
Audio Compression	AAC
Protocol	HTTP, RTSP, RTMP, RTP, TCP, UDP, ONVIF
Dual stream	Support
Interface	
Video Output	1 x HDMI Interface, 1x 3G-SDI Interface
Audio Input	1 x LINE IN
Audio Output	1 x LINE OUT
Network Interface	1 x 10M/100M
USB Interface	1 x USB2.0
Control Interface	1 x RS-232
General	
Control Protocol	VISCA/PELCO-P/PELCO-D
Address	0 - 63
Power Supply	DC12V
Power Supply	Below 50W
Working Temp	0°C - +40°C
Storage Temp	-20°C - +60°C
Dimension	500mm x 162mm x 137mm
Weight	3kg

***** Product specification are subject to change without notice *****