


VS Rugged PTZ Cameras

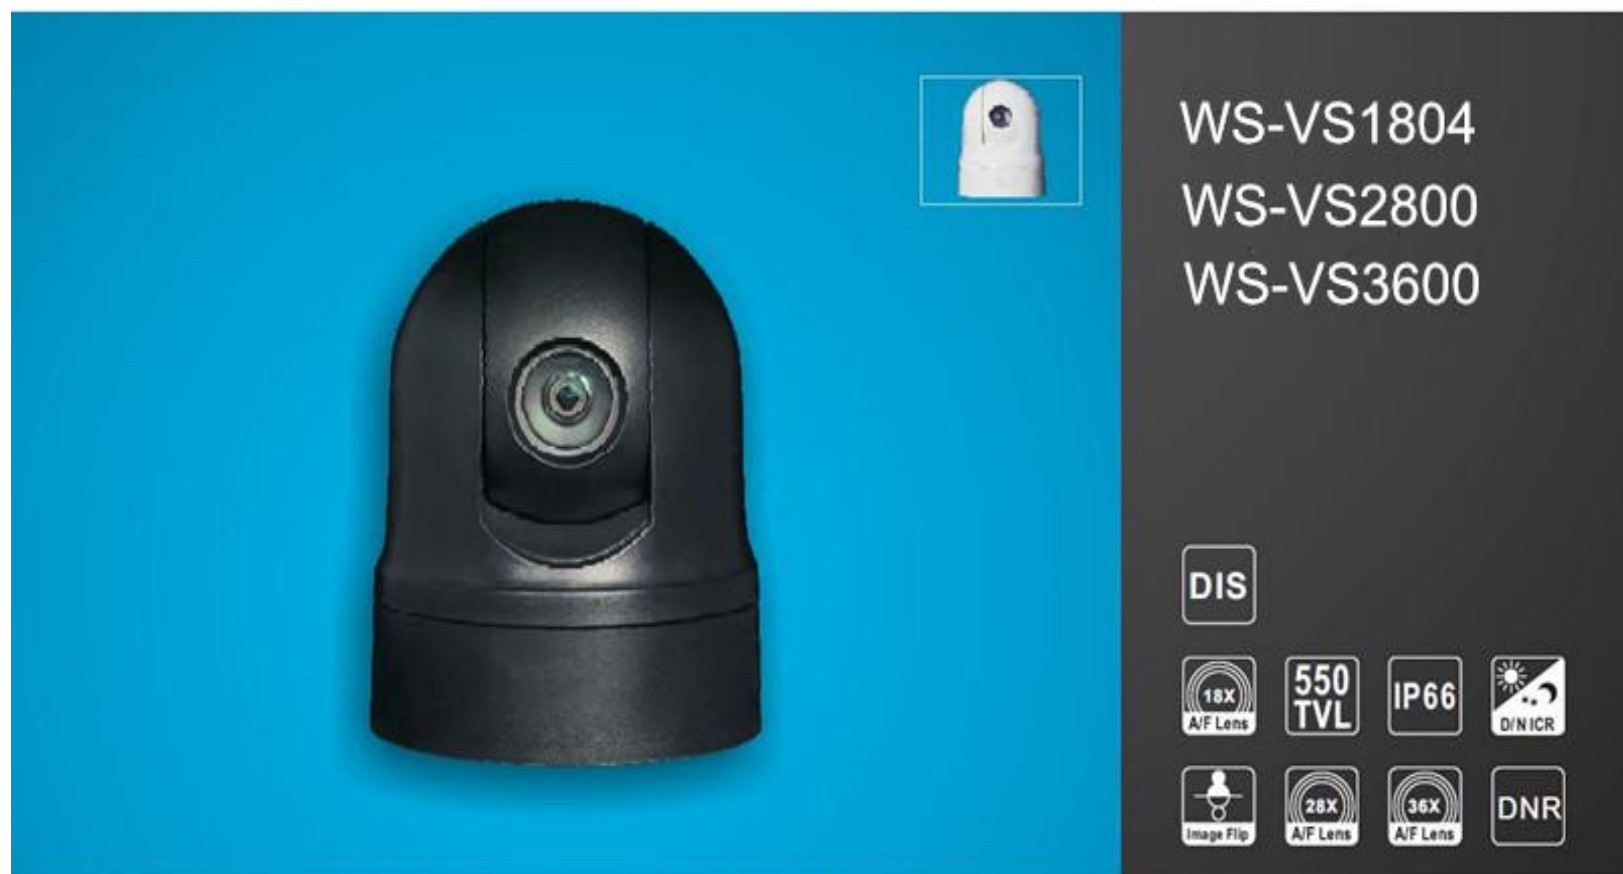


Features



- ※ Full weather proof, anti-vibration, IP66 protection;
- ※ Compact integrated design;
- ※ Random scan, cruise, pattern scan;
- ※ Has image flip function;
- ※ Car cigar Lighter supported;
- ※ Continuous 360° Pan, 90° Tilt;
- ※ Preset numbers up to 100;
- ※ P/T speed auto adjusted as per optional zoom;
- ※ Auto focus, WB, BLC;
- ※ Magnets for car roof mounting;
- ※ Optional damping system.

Dimensions

With No Damper

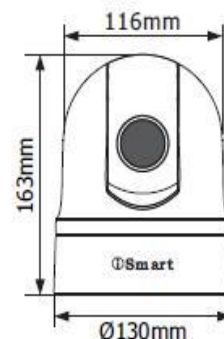

With Damper (Optional)

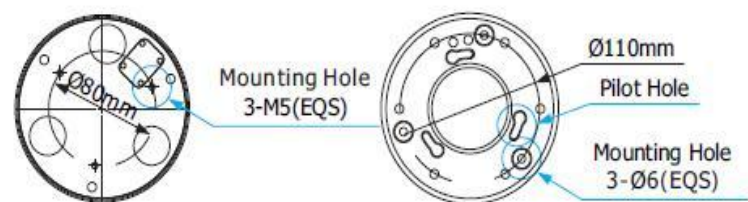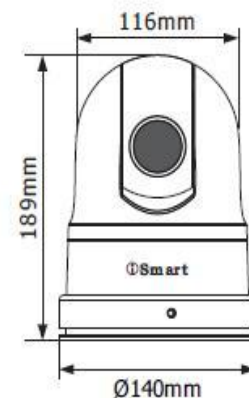

Specification

Model	WS-VS3600	WS-VS2800	WS-VS1804
IP Protection	IP66		
Image Sensor	1/4" SONY EX-View HAD CCD		
Resolution	550TVL		
Video Out	1.0±0.2Vp-p		
WDR	Yes	No	Yes
Min. Illumination	0.01Lux	0.0015Lux	0.01Lux
IR Cut Filter	Yes		
Lens	F1.6-F4.5 f=3.4-122.4mm	F1.35-F3.7 f=3.5-98mm	F1.4-F3.0 f=4.1-73.8mm
Optical Zoom	36X	28X	18X
Digital Zoom	12X		

S/N Ratio	Not less than 50dB
AGC	Auto/Manual
BLC	Auto/Manual
Pan/Tilt Range	Pan:0°~360° continuous; Tilt: - 15°~90°/sec
Pan/Tilt Speed	Pan:0.05°~120°/sec; Tilt:0.03~90°/sec,auto flip
Auto Cruise	Auto switch from 1 to 39 preset positins sequentialy
Pattern Scan	4 routes of pattern scan
Presets	100
Protocol	Pelco-D/P
Comm. Port	RS485
Band Rate	1200bps, 2400bps, 4800bps, 9600bps, 19200bps
Spectra Address	0 ~ 255
Working Temperatur	-45°C~ +55°C
Power Consumption	10W
Voltage	DC12V +/- 0.5V
Weight	1kg
Product specification are subject to change without notice	

www.winsafecctv.com